


OPTIMUS GEMINI II

PRODUCT CHARACTERISTICS

Gas:	Mix of butane/isobutane/propane
Burn time:	165 minutes at full power (with 450 g gas cartridge and one burner)
Boil time:	4 minutes for 1 L water (approx.)
Power:	4.6 kW nominal EN521 17'000 BTU/h EN417
Weight:	760g / 26.8oz (without accessories)
Dimensions:	385 x 195 x 105 mm (in operation) 305 x 70 x 105 mm (packed) 15 x 7.68 x 4.14 in (in operation) 12 x 2.76 x 4.14 in (packed)
Material:	Anodized aluminum, steel
Accessories:	Canister stand, transport bag
Article No.:	8021584 Optimus Gemini II

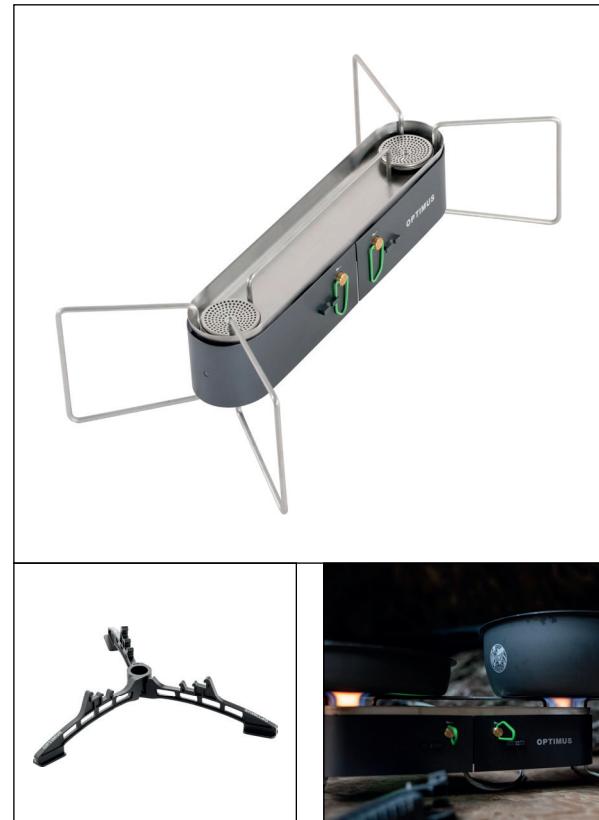


FACTS

- Two burners with independent flame control let you boil, simmer, and sear side by side.
- Innovative pressure control valve delivers steady performance from start to finish.
- A fold-flat design that fits easily in your pack—without compromising performance.
- Integrated wind shield keeps flames steady in rugged conditions.
- Foldable gas canister stand fits small and large gas canisters up to 450 g.
- Proudly built in Europe—designed for long-term durability and reliable performance in the field
- Patented Swiss Design, Global Design Pat. No. DM-211150

OPTIMUS GEMINI II

DETAILED VIEW

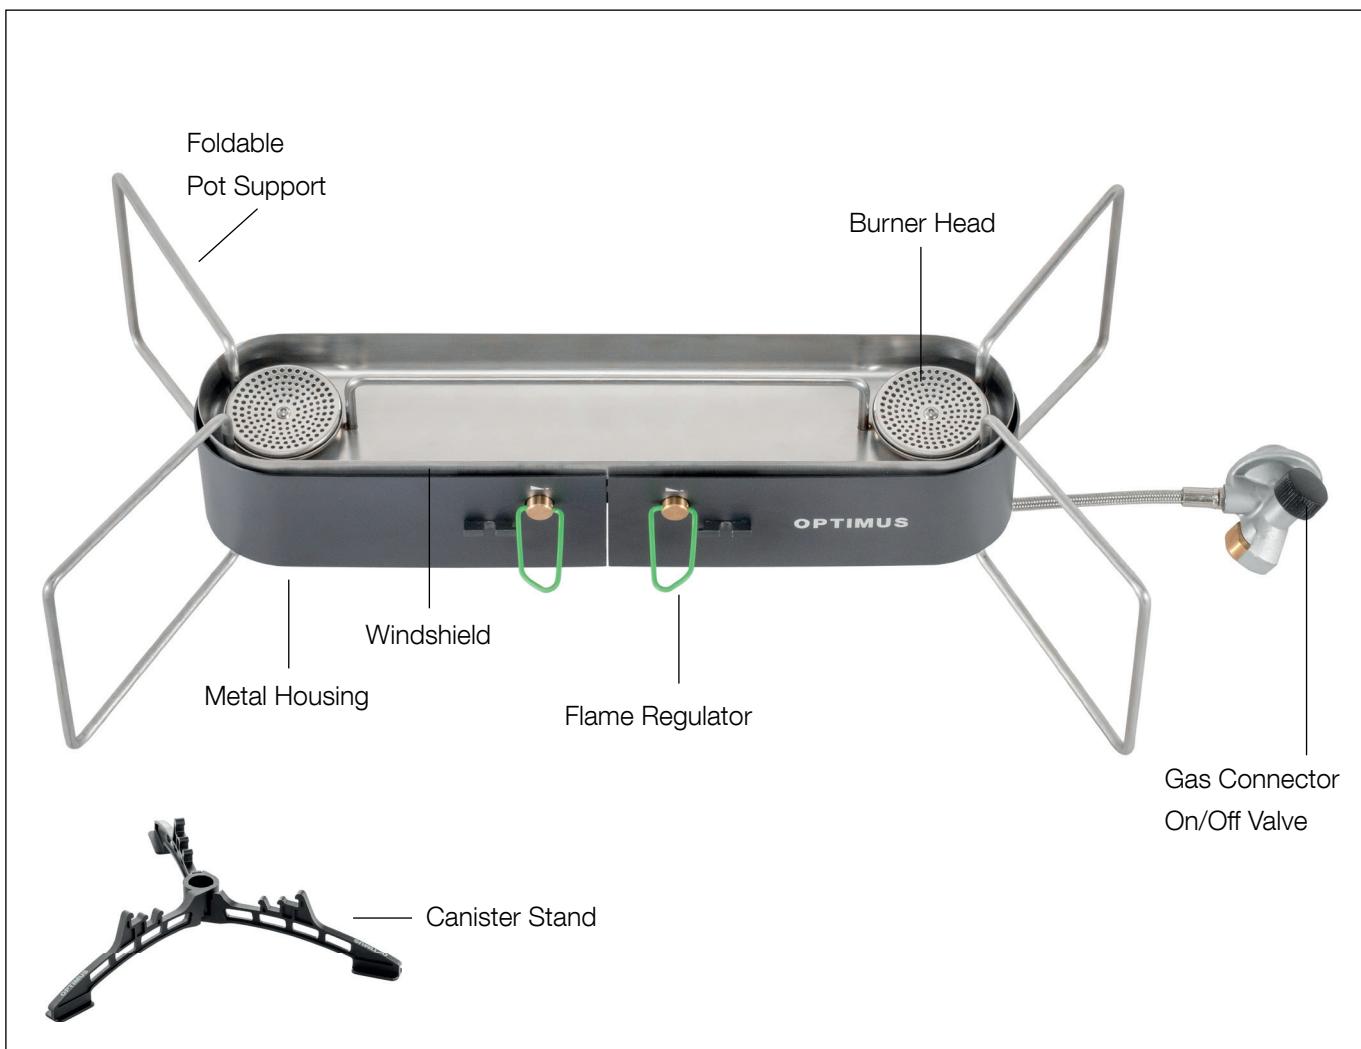

Katadyn reserves the right to modify product characteristics
Version: 18.11.2025